HAVELLS

Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

Endura Pro

LED BATTEN

The Endura Pro LED Weatherproof Batten is an energy-saving, environmentally friendly luminaire designed for longevity. With its corrosion-resistant and impact-proof construction, the surface-mountable waterproof fixture features a PC housing and opal finish cover, making it ideal for wet locations for a long lifespan. Additionally, the product offers the convenience of adjusting CCT and wattage settings through a slide switch on the driver.

FEATURES & BENEFITS

- Delivers high efficacy with 4′ light providing upto 6240 lumens.
- Selectable CCT and Wattage, and dimming capabilities for optimal customization.
- UL Listed, DLC certified, suitable for dry and wet location use.
- Operating Temperature: -20°C to +35°C
- Rated for 50,000 hours, offering a 5 year warranty.

Selectable Wattage | Selectable Color CCT | DLC LISTED PREMIUM | c UL us | MADE IN INDIA | IP65

Model Number	Wattage	Lumens
HL-VT-MW-MCCT-48W-4 Feet	36W/42W/48W	4680lm/5460lm/6240lm
HL-VT-MW-MCCT-20W-2 Feet	20W	2600lm

4′ model feature selectable CCT options: 3000K/4000K/5000K

PRODUCT SUMMARY

Efficacy
130 LM/W

CCT Options
3000K / 4000K / 5000K

CRI
≥80

Beam Angle
110°

Input Voltage
120-277Vac

Power Factor (PF)
0.95

THD
≤20%

Dimming
0-10V standard

Operating Temp.
-20°C to +35°C

Warranty
5 Years

Finish
Grey

Mounting
Surface & Suspended

Housing Material
Polly Carbonate

Lens Type
No Lens

OPTIONAL ACCESSORY

- Emergency Battery Backup.

APPLICATIONS

- Battery rooms, Chilling plants, Underground parkings, Garage, Freezers, Coolers and Outdoor Under Canopy.

Default Parameters	
Wattage	**CCT**
48W	5000K
20W	5000K

DLC PRODUCT INFORMATION			
Order ID	**DLC Model Number**	**DLC Source Identifier**	**Classification**
HL-VT-MW-MCCT-48W-4 Feet	ENDURA PRO LED BATTEN 4FT 48W SWSC IP65D	S-JV0Z1C	Premium

www.havellsLighting.com salesusa@havells.com 855-428-3557
© Havells Lighting LLC | All Rights Reserved.
Specifications and Data Subject to change without Notice.

PERFORMANCE

			3000K (≥80 CRI)		4000K (≥80 CRI)		5000K (≥80 CRI)	
Model Number	**Wattages**	**Input Current**	**Lumens**	**Efficacy**	**Lumens**	**Efficacy**	**Lumens**	**Efficacy**
HL-VT-MW-MCCT-48W-4 Feet	36W/42W/48W	0.315A/0.369A/0.421A	4680lm	130 lm/W	5460lm	130 lm/W	6240lm	130 lm/W

Lumen and efficacy data are based on the CCT of each higher wattage SKU.

Model Number	Wattages	System Lumens	CCT	Efficacy	Input Voltage (120V)
HL-VT-MW-MCCT-20W-2 Feet	20W	2600lm	3000K/4000K/5000K	130	120-277Vac

PACKAGING DETAILS

Model No.	Product Dimesion (LxWxH)	Case Qty (units)	Case Dimension (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)
HL-VT-MW-MCCT-48W-4 Feet	47.2x4.8x3.1	4	48.2x12.2x11.2	3.9	17.8
HL-VT-MW-MCCT-20W-2 Feet	23.6x4.8x3.1	4	24.1x12.2x11.2	1.9	10.2

*Boxes/Pallet-1 Box = 6Pcs

ACCESSORIES

Emergency
Battery Backup

© Havells Lighting LLC | All Rights Reserved.
Specifications and Data Subject to change without Notice.

DIMENSIONS

SELECTABLE POWER & CCT: 2FT

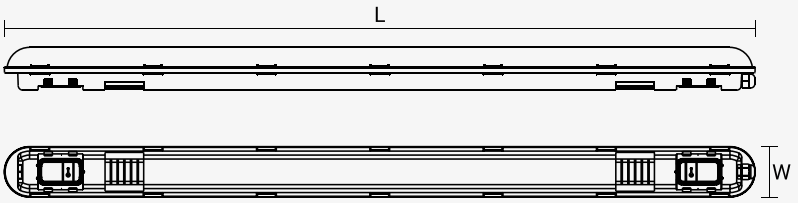

Length (L)	Width (H)	Height (H)
47.2 inch	4.8 Inch	3.1 Inch

SELECTABLE POWER & CCT: 4FT

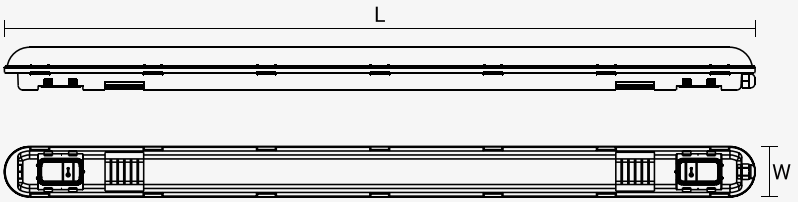

Length (L)	Width (H)	Height (H)
23.6 inch	4.8 Inch	3.1 Inch

PHOTOMETRIC RESULT

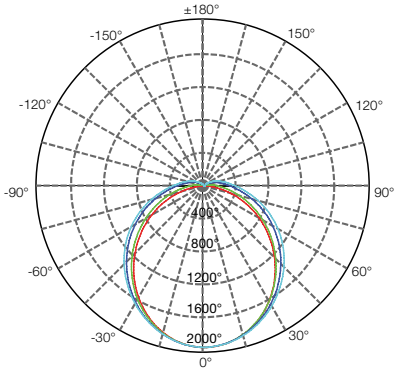

HLSSEPLB120525V7
Last Updated: Sep 09, 2025 11:00 AM

www.havellsLighting.com salesusa@havells.com 855-428-3557
© Havells Lighting LLC | All Rights Reserved.
Specifications and Data Subject to change without Notice.